


MOVING YOU FURTHER

HX900L

Tier 4 final Engine

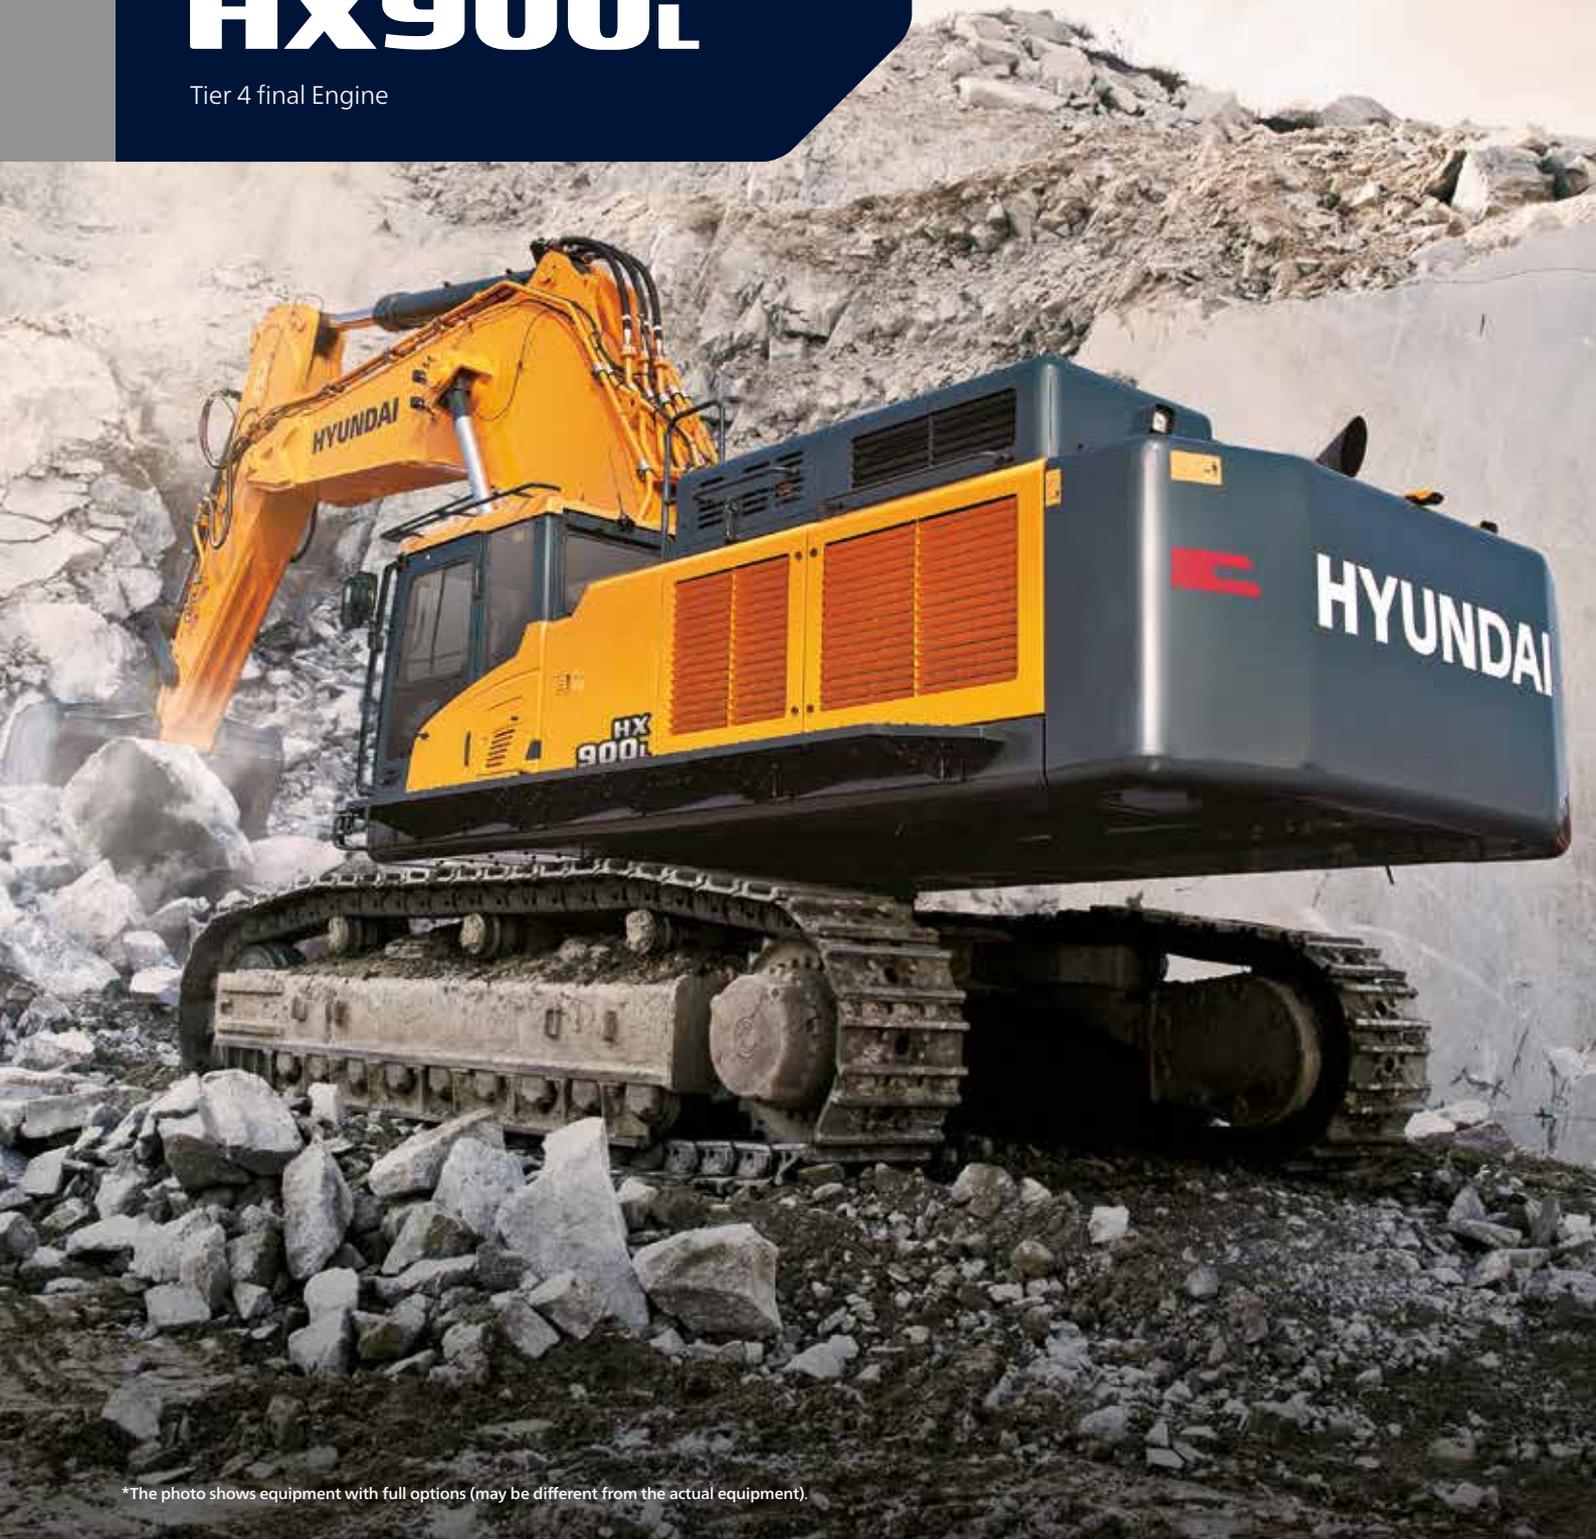

*The photo shows equipment with full options (may be different from the actual equipment).

Engine Output

478 kW (650 PS) at 2,100 rpm

Travel Speed

2.4 km/hr / 3.5 km/hr

Operating Weight

88,800 kg / 196,000 lb



RULE THE GROUND

We are pleased to introduce the HX Series Hyundai Excavator for which the industry's most highly experienced and skilled engineers have devoted themselves for a long time to developing a zero-defect product on the basis of the Hyundai Spirit of initiative, creativity and tenacity. The new HX Series Hyundai Excavator will fully reflect the customer needs in the field via thorough monitoring while maximizing field productivity with optimum fuel economy and performance based on rigorous field testing and strict quality control. The HX Series will leave you 100% satisfied whatever your expectations! With the Hyundai HX Series, you will be a genuine leader taking full control of the field.



*The photo shows equipment with full options (may be different from the actual equipment).

RULE THE GROUND

HX900L

The HX Series Excavator will offer you value and satisfaction beyond your expectations!
With Hyundai HX Series, you will be a genuine leader taking full control of the field.



WORK MAX, WORTH MAX

VALUE THAT ONLY HYUNDAI CAN OFFER - PERFORMANCE

- High Fuel Efficiency, Environmentally-Friendly Tier-4 Final Engine Eco Gauge, Fuel Efficiency Information, Variable Power Control (VPC) / Intelligent Power Control (IPC)
- Improved cooling performance
- Improved combined motion and work speed
- Maximized workability at night
- High-performance electronic fan clutch
- Straight-travel pedal **OPTION**



MORE RELIABLE, MORE SUSTAINABLE

TECHNOLOGICAL ADVANCES EXCEEDING EXPECTATIONS - DURABILITY

- Improved durability of boom/arm
- Reinforced upper and lower frame
- Hi-quality, hi-grade hose
- Cooling module with improved durability
- Drive motor
- High-durability swing motor
- Ultra-hard and wear resistant plate
- Pin, bush and shim with improved durability
- Bucket with strengthened durability and wear resistance
- Guard rail with a strengthened safety feature
- Full track guard exclusively designed for use in rugged terrain **OPTION**



INFOTAINMENT FRONTIER

MAXIMIZED CONVENIENCE WITH CUTTING-EDGE TECHNOLOGY - CONVENIENCE

- IT convergence based on the state of the art IT technology
- New type of air-conditioning system
- Deluxe air suspension seat
- Ergonomically designed RCV
- Cabin featuring reduced noise and vibration
- Smart key
- Sunroof
- Large-capacity air compressor
- Large storage space



MODERN COMFORT, SIMPLE AND SAFE SOLUTION

CONVENIENT AND SAFE SOLUTION - SERVICEABILITY

- Centrally deployed filters
- Hydraulic oil and filter with longer service life
- Air-conditioning air filter
- Easily accessible injection port for urea
- Air cleaner filter
- Thermal shielding designed to prevent burns
- Fully open engine room and side cover
- Vent hole to prevent entry of foreign substances
- Centralized grease injection port
- Anti-slip plate
- Centralized fuse box
- Hi MATE



*The photo shows equipment with full options (may be different from the actual equipment).



*The photo shows equipment with full options (may be different from the actual equipment)



Maximized Workability at Night



Equipped with a new Type of LED Warning Light

The HX Series is installed with a new warning light offering improved durability and visibility.

WORK MAX, WORTH MAX
THE VALUE THAT ONLY HYUNDAI CAN PROVIDE!


The HX Series delivers higher power output and superior fuel economy with the adoption of an environmentally-friendly, high performance engine that will fully satisfy customer requirements at every type of worksite, having endured and successfully passed rigorous tests in diverse worksites and conditions.



Heavy-duty Strength in its class offering 16,400 cc / 650 HP!

The HX Series meets the Tier-4 Final emissions standard with an environmentally-friendly engine that delivers increased power for powerful work performance.

- Application of DOC +SCR makes it possible to reduce costs
- 6-cylinder engine with high output power and better responsiveness
- Economic efficiency can be secured with reduced fuel consumption compared to the output power
- Convenient injection of urea with overflow cover

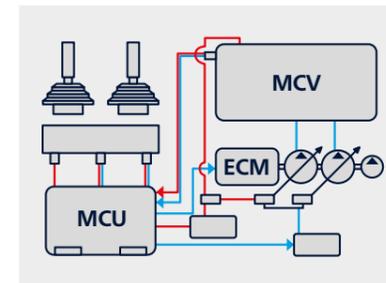

Variable Power Control (VPC) / Intelligent Power Control (IPC)

The adoption of variable power control (VPC) and intelligent power control makes it possible to optimize the control of output power and pump flow rate, thereby improving work performance and fuel economy.



ECO Gauge

The ECO gauge allows operators to check engine torque and fuel efficiency via the gauge level and color, providing guidance on economical operation.

Adoption of a New Type, High-performance Electronic Fan Clutch

Fan clutch RPM can be automatically adjusted through the detection of coolant temperature, thereby improving fuel economy and cooling performance.



Fuel Economy Information

As the equipment operation status and detailed fuel economy information for each mode are provided through the cluster, it is possible to check economical operation and fuel level.



High-capacity Alternator

It provides sufficient electrical capacity to run various electronic devices.


MORE RELIABLE, MORE SUSTAINABLE

TECHNOLOGICAL ADVANCES THAT EXCEED CUSTOMER EXPECTATIONS!

The value of the HX Series lies in its excellent durability which helps maintain the original sturdiness for a long period of time. The upper and lower frame structure, which can endure external shocks and a variety of high-load work, and the attachments proven through rigorous testing, will reveal their true merit even in the harshest working environments.

High-rigidity Boom and Arm with Improved Durability

The high rigidity boom and arm, manufactured through rigid testing, provide stable workability even with high-load works. With the strengthened torsional rigidity of the boom and the installation of a highly wear-resistant shim, durability has been further improved.

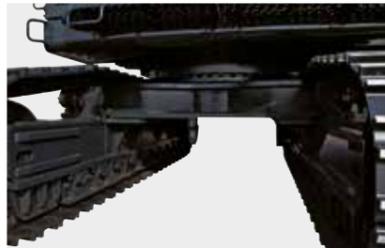

Reinforced Lower Frame

The X-shaped lower frame guarantees high durability while its undercover protects internal functional parts even when working in rugged terrain.



Durability of Track Tension Spring Improved

To prevent the entry of foreign substances and inside air and to protect against corrosion of the spring, a urethane tube has been mounted around the tension spring connected to the idler.



High-quality, High-grade Hose

The adoption of a high-grade hose with significantly improved heat resistance and durability delivers the highest possible durability even in harsh working conditions.



Durability-improved Cooling Module

The HX Series excavators can provide the highest possible productivity even in extremely low or high temperatures as well as in rugged working conditions thanks to the high-durability cooling module proven through strict testing conditions.



Drive Motor

The exclusively designed high-performance drive motor offers superior driving power and significantly improved durability, and can exert powerful working performance in the most adverse working conditions.



Highly Durable Swing Motor

The internally designed, high-rigidity swing motor, which has passed strict durability verification, can offer strong durability even in the harshest working environments.



High-hardness, Wear-resistant Plate

The wear-resistant cover plate installed on the end of the arm helps minimize wear of the connection between arm and bucket even after working for a long period of time, and reduces shaking of the bucket, making it possible to perform high-load works under a stable condition.



Full Track Guard Exclusively Designed for Harsh Environments

It helps prevent separation of the track and strengthens durability by protecting the link and roller when working in harsh environments.



*The photo shows equipment with full options (may be different from the actual equipment).



Improved Durability of Pin, Bush and Shim



Bucket with Improved Durability and Wear Resistance



Safety-strengthened Guardrail



*The photo shows equipment with full options (may be different from the actual equipment)

INFOTAINMENT FRONTIER

MAXIMIZED CONVENIENCE WITH CUTTING-EDGE TECHNOLOGY

The heavy concentration of diverse convenience features in the cabin enables easy access and control by operators, and the sophisticated infotainment system embedded with Hyundai's state-of-the-art IT technologies contributes to improving productivity further!
 The cutting-edge technology of Hyundai's HX Series offers value and satisfaction beyond customers' expectations!

Equipped with cutting-edge IT Technologies

The 8-inch high resolution cluster with touch screen provides integrated information on diverse operations and control functions to maximize the operator's convenience. In addition, intuitive control is made possible with the adoption of haptic control.


- Smart phone-connected Miracast
- Eco gauge level and fuel economy operation information
- Haptic control with the adoption of a sensitivity switch
- Hands free smart phone-connected music play



New type of cluster



Haptic control

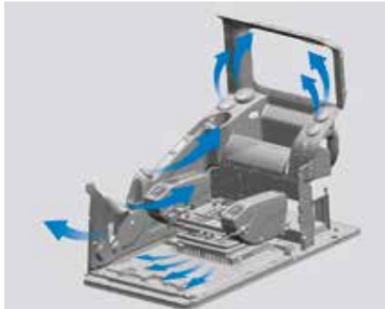

New Air-conditioning System

It is possible to adjust the desired temperature through the Air Mix type cooling/heating system and the APTC with increased capacity. The new type of air-conditioning system can quickly regulate the air flow in the cabin, providing comfort and convenience during work.



Ergonomically Designed RCV

The ergonomically designed RCV lever offers the best responsiveness and fine maneuverability, minimizing the operator's fatigue when working over an extended period of time.



Cabin with Less Noise and Reduced Vibration

The new cabin mount has made it possible to reduce cabin vibration and noise significantly.



Sunroof



Large-capacity Air Compressor



Sufficient Storage Space



Smart Key

The adoption of an auto shutdown function that automatically stops the engine when a set count has been reached, along with the engine start button.



Deluxe Air Suspension Seat

In order to provide a comfortable working environment and reduce fatigue when working over an extended period of time, the air suspension seat with built-in hot-wires is provided as a standard feature.

MODERN COMFORT, SIMPLE AND SAFE SOLUTION

CONVENIENT AND SAFE SOLUTION

Conceived for operator safety and convenience, the HX Series offers an optimum working environment where jobs can be performed easily and conveniently as the machine can be checked anytime, anywhere.



Full Open Engine Hood

Considering the engine, the full open type engine hood is designed to secure sufficient service space, and to ensure easy daily checks and maintenance.



Centralized Deployment of Filter

This is designed to maximize the operator's convenience.



Air Horn OPTION

This emits a warning sound up to 5 times louder than that of the disk-type horn to prevent accidents in noisy working environments.



Air-conditioning Air Filter

The filter room is located outside the cabin to make it easier to replace the filters, while the outside air temperature sensor helps improve cooling/heating performance.



Vent Hole for Preventing Entry of Foreign Substances

By changing the shape of the side cover vent hole, rust and the entry of foreign substances can be effectively prevented.

HiMATE

It's convenient, easy and valuable

Hi MATE, Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi MATE enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

What are the Benefits?



Increase Productivity

It helps you operate machines efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



Convenient and Easy Monitoring

There is not much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.



Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geo-fence boundary, you will get alerts.



*The photo shows equipment with full options (may be different from the actual equipment).



Simple-to-replace Air Cleaner Filter



Centralized Grease Injection Port



Anti-slip Plate



Centralized Fuse Box

SPECIFICATIONS

Engine

Maker / Model	Scania DC16 084A
Type	Environment-friendly Water Cooling 4-Stroke Cycle Diesel Engine Direct Injection V8 Cylinder, Turbo Charger, Intercooler
Maximum Torque	320 kgf.m / 1,400 rpm
Cylinder's Inner Diameter x Stroke Length	130 mm x 154 mm
Displacement	16,400 cc
Battery Capacity	4 x 12 V x 160 Ah
Starting motor	24 V x 7 kW
Alternator	24 V, 100 A
Rated Output Power	478 kW (650 PS) / 2,100 rpm

Hydraulic system

Main pump	
Type	Variable-Capacity Axial Piston Pump
Maximum Flow Rate	2 x 504 ℓ/min
Auxiliary Pump - PILOT	Gear pump

Hydraulic motor	
Driving	2-Step Axial Piston Motor (including brake valve and parking brake)
Swing	Axial Piston Pump (including Auto Brake)

Relief valve setting	
Driver Circuit	330 kgf/cm ² (4,693 psi)
Driving	360 kgf/cm ² (5,120 psi)
Power Boost (Boom, Arm, Bucket)	360 kgf/cm ² (5,120 psi)
Swing circuit	300 kgf/cm ² (4,270 psi)
Pilot circuit	40 kgf/cm ² (570 psi)
Service valve	Installation

Hydraulic cylinders	
Number of Cylinders	Boom: Ø 215 x 1,935 mm (2EA) Arm: Ø 225 x 2,290 mm (1EA) Bucket for 2.95 m arm: Ø 215 x 1,593 mm (1EA) Bucket for 3.6 m; 4.4 m arm: Ø 200 x 1,593 mm (1EA)
Cylinder's Inner Diameter x Stroke Length	

Driving and Braking

Motor Type	Hydrostatic Type
Driving Motor	Axial Piston Motor
Deceleration System	Planetary Reduction Gear
Max. Drawbar Pull	66,800 kgf
Maximum Driving Speed	2.4 km/hr / 3.5 km/hr
Gradeability	35° (70%)
Parking brake	Wet Multi-Plate Disk

Manoeuvrability

The joystick lever and pedal operated by pilot pressure ensure soft and light manoeuvre, resulting in reduced fatigue for Operators.

Pilot control	Joystick Lever (2EA) and Safety Lever (Left side): Swing and Arm, (Right side): Boom and Bucket
Driving and Steering	Lever (2EA) and Pedal
Engine Throttle	Electronic, Dial Type

Swing system

Swing motor	Axial Piston Motor
Swing reduction	Planetary reduction gear
Swing bearing lubrication	Grease Filling Type
Swing brake	Wet Multi-Plate Disk
Swing speed	6.2 rpm

Coolant and Lubrication Oil Capacity

Charging Type	ℓ
Fuel tank	1,110
Engine coolant	70
Engine oil	38
Swing Reducer - Gear Oil	14
Final Drive - Gear Oil	20
Hydraulic system (including tank)	940
Hydraulic tank	450
Urea Tank	69

Undercarriage

The X-shaped center frame and reinforced-type center frame were fabricated by special structural weld, and the undercarriage consists of roller, idler, track adjuster with shock absorbing spring, and sprocket and track chain.

Center frame	X - leg type
Track frame	High-Strength Box Type
Number of Shoes (for one side)	52
Number of Carrier Rollers (for one side)	3
Number of Track Rollers (for one side)	9
Number of Rail Guards (for one side)	2

Operating Weight

Operating weight includes 8,200 mm boom; 3,600 mm arm, lubrication oil, coolant, 3.60 m³ bucket (SAE), fully filled fuel tank and hydraulic tank, and all other standard specifications.

Track Shoe		Operating weight	Contact pressure
Type	Width mm	kg	kgf/cm ² (psi)
Double grouser	700 mm	88,800 kg	1.14 (16.21)
	800 mm	89,620 kg	1.01 (14.36)
	900 mm	90,440 kg	0.90 (12.80)

Weights of the main parts

Upper Part (excluding the lower center frame)	18,370 kg
Counterweight	13,600 kg
Boom (including arm cylinder)	9,420 kg


Digging Force

Boom	Length	mm	7,200	8,200	8,200	8,200
	Weight	kg	8,810	9,420	9,420	9,420
Arm	Length	mm	2,950	2,950	3,600	4,400
	Weight	kg	4,950	4,950	4,990	5,140
Bucket Digging Force	ISO	kgf	39,300	39,300	34,100	34,100
	SAE	kgf	44,800	44,800	38,900	38,900
Arm Digging Force	ISO	kgf	38,000	38,000	31,400	27,200
	SAE	kgf	39,500	39,500	32,600	28,000

DIMENSIONS & WORKING RANGE

HX900L Dimensions

7.2 m; 8.2 m Boom / 2.95 m; 3.6 m; 4.4 m Arm

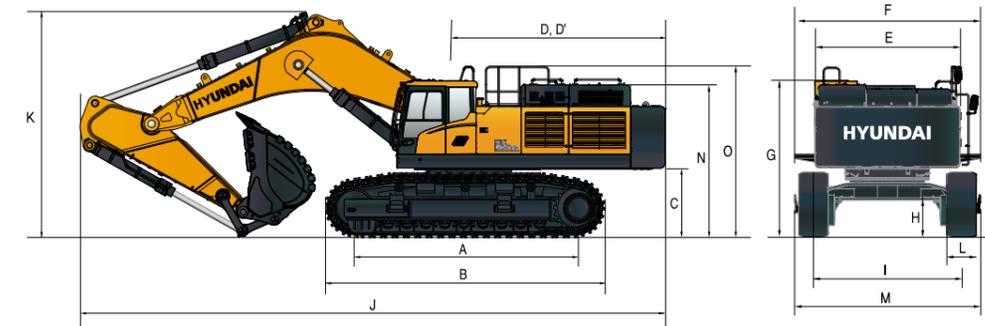


Unit : mm

Division	7.2 m / 8.2 m Boom	
A Tumbler Distance	5,130	
B Track Length	6,435	
C Ground clearance - Counterweight	1,620	
D Tail Swing Radius	4,650	
D' Rear End Length	4,550	
E Upper Part Height	3,420	
F Overall Width - Including Cat Walk	4,290	
G Ground Clearance - Operating Room	3,830	
H Min. Ground Clearance	880	
I Track gauge	Extended	3,500
	Retracted	4,200

Division	7.2 m Boom	8.2 m Boom		
	2.95 m Arm	2.95 m Arm	3.6 m Arm	4.4 m Arm
J Overall length	13,620	14,620	14,460	14,510
K Overall height	5,360	5,220	5,180	5,440
L Track shoe width		700	800	900
M Undercarriage Width	Extended	4,200	4,300	4,400
	Retracted	3,480	3,580	3,680

· The specifications described above may be changed without prior notice due to quality improvements.
· The colors used in this catalogue may differ from actual colors to a certain degree.
* Indicates standard specifications.

HX900L Working range

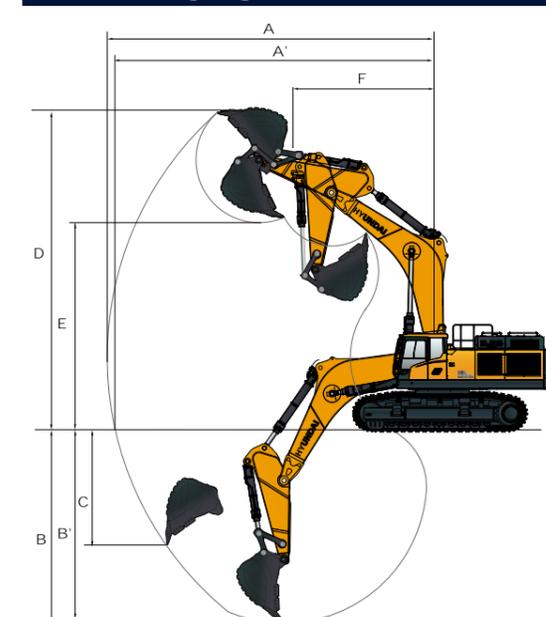

Unit : mm

Division	7.2 m Boom	8.2 m Boom*		
	2.95 m Arm	2.95 m Arm	3.6 m Arm	4.4 m Arm
A Max. Digging Reach	12,300	13,360	13,920	14,670
A' Max. Digging Reach on Ground	12,020	13,090	13,670	14,430
B Max. Digging Depth	7,230	8,160	8,810	9,610
B' Max. Digging Depth (8' level)	7,090	8,020	8,680	9,500
C Max. Vertical Digging Depth	4,370	5,250	6,000	6,670
D Max. Digging Height	11,910	12,630	12,780	13,190
E Max. Dumping Height	7,800	8,490	8,690	9,030
F Min. Swing Radius	5,100	5,930	5,970	5,970

* Indicates standard specifications.

LIFTING CAPACITY

Rating over-front Rating over-side or 360 degrees

HX900L


Boom: 8.20 m; Arm: 4.4 m; Bucket: 4.25 m³; Shoe: 900 mm double grouser

Lift-point height (m / ft)	Lift-point radius												At max. reach				
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		9.0 m (29.5 ft)		10.5 m (34.4 ft)		12.0 m (39.4 ft)		Capacity	Reach	
10.5 m 34.4 ft	kg														*10,320	*10,320	9.47
	lb														*22,750	*22,750	(31.1)
9.0 m 29.5 ft	kg														*9760	*9760	10.55
	lb														*21,520	*21,520	(34.6)
7.5 m 24.6 ft	kg														*9510	*9510	11.33
	lb														*20,970	*20,970	(37.2)
6.0 m 19.7 ft	kg														*9480	*9480	11.87
	lb														*20,900	*20,900	(38.9)
4.5 m 14.8 ft	kg														*9640	*9640	12.19
	lb														*21,250	*21,250	(40.0)
3.0 m 9.8 ft	kg														*10,000	*10,000	12.33
	lb														*22,050	*22,050	(40.5)
1.5 m 4.9 ft	kg														*10,590	*10,590	12.28
	lb														*23,350	*23,350	(40.3)
0.0 m 0.0 ft	kg														*11,480	*11,480	12.04
	lb														*25,310	*25,310	(39.5)
-1.5 m -4.9 ft	kg														*12,810	*12,810	11.60
	lb														*28,240	*28,240	(38.1)
-3.0 m -9.8 ft	kg	*22,010	*22,010	*32,840	*32,840	*30,200	*30,200	*24,430	*24,430	*19,920	*19,920	*15,960	*15,960		*14,630	*13,040	10.94
	lb	*48,520	*48,520	*72,400	*72,400	*66,580	*66,580	*53,860	*53,860	*48,480	*48,480	*35,190	*35,190		*32,250	*28,750	(35.9)
-4.5 m -14.8 ft	kg	*31,900	*31,900	*31,930	*31,930	*26,240	*26,240	*21,400	*21,400	*17,090	*17,090				*13,860	*13,860	10.01
	lb	*70,330	*70,330	*70,390	*70,390	*57,850	*57,850	*47,180	*47,180	*37,680					*30,560	*30,560	(32.8)
-6.0 m -19.7 ft	kg														*12,210	*12,210	8.72
	lb														*26,920	*26,920	(28.6)

- Lifting capacity is based on ISO 10,567.
- Load point is the end pin point of front attachment.
- Lifting capacity does not exceed 75% of tipping load or 87% of hydraulic capacity.
- (*) indicates the load limited by hydraulic capacity.

BUCKET SELECTION GUIDE

BUCKETS: All buckets are welded with wear-resistant material.

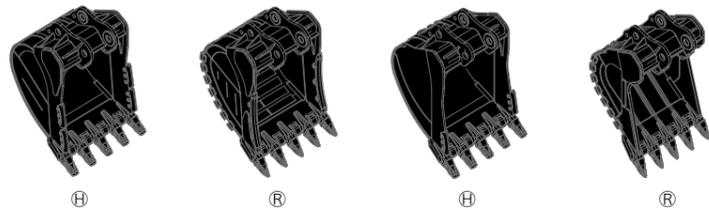

Capacity (m ³)	SAE heaped	CECE heaped	Width (mm)	Weight (kg)	Tooth EA	7.2 m Boom		8.2 m Boom	
						2.95 m Arm	2.95 m Arm	3.6 m Arm	4.4 m Arm
Ⓜ 3.70	3.30	3.30	1,845	4,370	4	●	○	■	■
Ⓜ 4.25	3.75	3.75	2,045	4,730	5	●	■	▲	▲
Ⓜ 4.85	4.25	4.25	2,245	5,000	5	○	▲	▲	▲
Ⓜ 5.40	4.75	4.75	2,445	5,275	5	■	-	-	-
Ⓜ 5.80	5.05	5.05	2,585	5,555	6	▲	-	-	-
Ⓜ 3.70	3.30	3.30	1,845	4,850	4	●	○	■	■
Ⓜ 4.25	3.75	3.75	2,045	5,235	5	○	■	▲	▲
Ⓜ 4.85	4.25	4.25	2,245	5,530	5	■	▲	-	-
Ⓜ 5.40	4.75	4.75	2,445	5,830	5	■	-	-	-
Ⓜ 4.25	3.75	3.75	2,045	4,150	5	●	■	■	■
Ⓜ 3.60	3.10	3.10	1,920	4,600	5	●	○	■	■

Ⓜ : Heavy Duty / Light-Heavy Duty
 Ⓜ : Rock / Rock-Special

- Applicable for materials with density of 2,100 kg/m³ (3,500 lb/yd³) or less
- Applicable for materials with density of 1,800 kg/m³ (3,000 lb/yd³) or less
- Applicable for materials with density of 1,500 kg/m³ (2,500 lb/yd³) or less
- ▲ Applicable for materials with density of 1,200 kg/m³ (2,000 lb/yd³) or less

TRANSPORTATION PLAN

Upperstructure

Dimensions (mm)			Weight
L	H	W	kg
6,080	2,825	3,420	25,780

Track Frame

Shoe Width (mm)	Dimensions (mm)			Weight
	L	H	W	kg
700	6,435	1,480	1,160	13,370
800	6,435	1,480	1,160	14,130
900	6,435	1,480	1,210	14,490

* Specification and weight based on inner track
 * Footboard Mounting Specifications

Bucket

Bucket Capacity (m ³)	Dimensions (mm)			Weight
	L	H	W	kg
Ⓜ 3.70	2,570	2,090	1,845	4,370
Ⓜ 4.25	2,570	2,090	2,045	4,730
Ⓜ 4.85	2,570	2,090	2,245	5,000
Ⓜ 5.40	2,570	2,090	2,445	5,275
Ⓜ 5.80	2,570	2,090	2,585	5,555
Ⓜ 3.70	2,545	2,150	1,845	4,850
Ⓜ 4.25	2,545	2,150	2,045	5,235
Ⓜ 4.85	2,545	2,150	2,245	5,530
Ⓜ 5.40	2,545	2,150	2,445	5,830
Ⓜ 4.25	2,570	2,090	2,045	4,150
Ⓜ 3.60	2,485	2,040	1,920	4,600

* Bucket tooth, side cutter included

Boom & Arm Cylinder

Boom (mm)	Dimensions (mm)			Weight
	L	H	W	kg
7,200	7,565	2,745	1,340	8,810
8,200	8,565	2,580	1,340	9,420

* includes arm cylinder, piping, and pin

Arm & Bucket Cylinder & Control Linkage

Arm (mm)	Dimensions (mm)			Weight
	L	H	W	kg
2,950	4,490	1,780	730	4,950
3,600	5,135	1,600	730	4,990
4,400	5,930	1,590	730	5,140

* includes bucket cylinder, linkage, and pin

Boom Cylinder

Dimensions (mm)			Weight
L	H	W	kg
3,185	360	550	860

Counter Weight

HYUNDAI	Dimensions (mm)			Weight
	Arm	L	H	W
STD	3,420	1,540	790	13,600
OPT	3,420	1,540	790	16,500

Catwalk

	Dimensions (mm)			Weight
	L	H	W	kg
LH Front, Rear	1,475	50	480	30
RH Rear				
LH Mid	1,970	50	480	45
RH Front (2EA)	1,200	50	480	30

Frontless Excavator



*Bucket cylinders included

STANDARD EQUIPMENT

Premium Cabin (Iso)

All-weather Steel Cab with 360° Visibility
Safety Glass Windows
Rise-up Type Windshield Wiper
Sliding Fold-in Front Window
Sliding Side Window (LH)
Lockable Door
Hot & Cool Box
PC Glass Type Cabin Sun Roof
Radio & Usb Player
12 Volt Power Outlet
Bluetooth Handsfree & Integrated Communication
Controller / Control System
Sun Visor
Cabin Guard
Fog (Falling Object Guard, ISO10262)
Noise / Vibration Reduction Cabin Mount
Brand New Air Conditioning System

Cabin Lights (Front, Rear)

Intelligent Power Control (IPC) System Applications

Operation Mode Selection System
One-Touch & Auto Deceleration System
Automatic Warm-Up System
Automatic Overheat Prevention System

Automatic Air Conditioning System

Full Automatic Temperature Controller
Frost-Free / Defroster

Self-Diagnostics System

Cold Weather Starting Aids (Air Grid Heater)

Centralized Monitoring System

8 Inch / Led Capacitive Monitor
Eco Gauge
Fuel Efficiency Information / Fuel Level Gauge
Integrated / Combined Control Switch
Advanced Operator-Friendly Cluster
Haptic Controller
Air Conditioner / Engine rpm Integrated Control

Various Gauge

Fuel Level Gauge
Cooling Water Temperature Gauge
Hydraulic Oil Temperature Gauge

Warning Lights

Engine Check
Overload
Communication Error (Emergency Warning Light)
Low Battery
Air Cleaner Clogging
Indicators
Power Boost
Low Speed / High Speed
Fuel Warmer
Auto Idle

Equipment for Convenience

Outside Rearview Mirrors (3EA)
Air-suspension Seat With Heater
Hydraulic Joystick Lever
Console Box with Height Adjustable System
Front Working Light (11EA)
Fuel Filler Pump
Large Capacity Air Compressor
Rearview Camera
Automatic Lubrication
Hi MATE (Remote Management System)
Air Horn

Safety Device

Battery Master Switch
Boom Holding System / Arm Holding System
Accumulator for Lowering Attachment
Travel Alarm / Warning Light (LED)

Durability Specifications

Track Shoes (700 mm; 27.6")
Full Track Rail Guard
Lower Under Cover
Fuel Heater
Large Capacity of Air Cleaner
Hi-grade Hoses

Other

Batteries (4 x 12 V x 160 Ah)
Washable Clean-out Dust Net for Cooler
Automatic Swing Parking Brake
Air Breather for Fuel Line
Fire Extinguishers for Fire Suppression

OPTION

Breaker Line
Quick Coupler
Wirenet Guard (Protection guard for the front of the cabin)
FOG Guard (Protection guard for front and upper parts of cabin)
Track Shoe (Heavy Duty Grouser Shoe 700 mm / 2-bar)
Wet-type of Air Cleaner
Boom Floating
ECO Breaker Mode

- * Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.
- * The photos may include attachments and optional equipment that are not available in your area.
- * Materials and specifications are subject to change without advance notice.
- * All imperial measurements rounded off to the nearest pound or inch.
- * The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant HFC-134a (Global Warming Potential = 1430). The system contains 0.9 kg of refrigerant which has a CO₂ equivalent of 1.2870 metric tonne.



PLEASE CONTACT

Hyundai Construction Equipment Europe nv

Hyundailaan 4, 3980 Tessenderlo, Belgium Tel: (32) 14-56-2200 Fax: (32) 14-59-3405 www.hyundai.eu

EN - 2018.09 Rev 1