



I-120

IMPACT CRUSHER



I-120
f YouTube e

WORKS FOR YOU.™

I-120

The second generation I-120 impact crusher has been designed with improved material flow and enhanced productivity in quarrying, mining, recycling and construction demolition applications. Incorporating the proven Terex® CR038 impact chamber with direct drive and advanced electronic control system the machine provides operators with high material reduction ratios and produces a consistent product shape.

For operators in recycling and demolition applications the options of an underpan feeder and autoadjust on the chamber secondary apron are also available for the machine.

STANDARD FEATURES

ENGINE:

Tier 3 / Stage IIIA : Caterpillar C9 Tier 3 ACERT. 280kW (375hp)

Stage IIIA Constant Speed: Scania DC9 292kW (392hp)

IMPACT CHAMBER:

Terex CR038 Impact chamber

Fully Hydraulically assisted apron setting and hydraulic apron release

Manual raise chamber flap allowing extra inlet clearance

4 bar rotor - Martensitic blow bars 2 High & 2 Low

Direct Drive via Clutch

Drive belt tensioner wheel

Blow bar lifting tool supplied

Tip Speed range 36-45 m/sec (118-148 ft./sec).

HOPPER/FEEDER:

VGF Fixed Hopper

Stepped grizzly feeder with integral pre-screen, standard 50mm spacing

Mesh aperture on grizzly feeder: 38mm

Selectable discharge to by-pass conveyor or main conveyor

Blanking mat for VGF

MAIN CONVEYOR:

Belt: 1.1m (44") full length

Hydraulic raise/ lower of main conveyor

AUXILIARY CONVEYORS:

Piped for over band magnet

CLIMATE SPEC:

Standard oils - (Recommended for ambient temperatures between -5 to +30°C)

DUST SUPPRESSION:

Piped for dust suppression c/w Spray bars

ELECTRICAL:

Emergency stops

Hand Held Track Control Set with Connection Lead

GENERAL:

Safety Guards in Compliance with Machinery Directive

Variable Speed Tracking

FEATURES:

- ▶ Fully hydraulic apron setting assist provides convenient and efficient adjustment of the chamber aprons.
- ▶ Heavy duty vibrating feeder (VGF) with integrated prescreen removes dirt fines and sizes bypass material for reprocessing.
- ▶ Curved corners on the feeder wear plate to minimize the chances of material building up in the corners when running in sticky material.
- ▶ For efficient and safer onsite set up and tear down processes the hopper is hydraulically folded and locked from ground level.

IMPACT CHAMBER

- ▶ Rotor diameter: Ø1033mm (41")
- ▶ Rotor width: 1100mm (44")
- ▶ Inlet opening: 1130mm (45") x 800mm (32")
- ▶ Newly designed Terex Impactor chamber
- ▶ 4 Bar rotor standard- 2 high/2 low
- ▶ Direct drive via 'V' belts
- ▶ Hydraulic assisted apron setting

HOPPER / FEEDER

- ▶ Hopper capacity: 5m³ (6.5 yd³)
- ▶ Hopper capacity - With Ext: 8m³ (10.4 yd³)
- ▶ 4m (13' 1") rear feed width with hydraulic folding hopper extensions (optional)
- ▶ Hydraulic locking
- ▶ 8mm wear resistant side walls

MAIN CONVEYOR

- ▶ Belt Width: 1.1m (44")
- ▶ Discharge Height: 3.5m (11' 5")
- ▶ High spec scraper at head drum
- ▶ Dust suppression standard
- ▶ Low level greasing standard
- ▶ Hydraulic lowering for transport
- ▶ Full length belt standard

BYPASS CONVEYOR (OPTIONAL)


- ▶ Belt Width: 650mm (26")
- ▶ Max achievable discharge height target approx. 2.5m
- ▶ Low level greasing
- ▶ High spec scraper at head drum

POWERPACK


- ▶ Tier 3 / Stage IIIA: Caterpillar C9 Engine Power: 280kW (375hp) Engine Speed: 1700 rpm-2100 rpm
- ▶ Stage IIIA Constant Speed: Scania DC9 Engine Power: 292kW (392hp) Engine Speed: 1500-1900 rpm
- ▶ Tier 4F / Stage IV: Scania DC9 Engine Power: 294kW (400hp) Engine Speed: 1500 rpm-1900 rpm



TRANSPORT DIMENSIONS

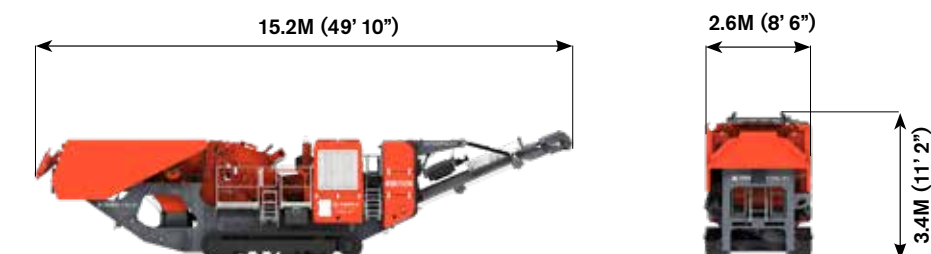

WORKING DIMENSIONS

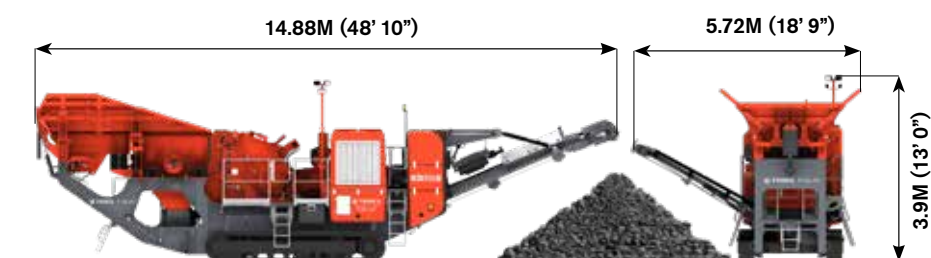

WEIGHT


37,000kg (81,571lbs)

(Pre-screen, Hopper Extensions, By-pass Conveyor & Twin Pole Magnet)



Tlink™

FLEET MANAGEMENT SYSTEM

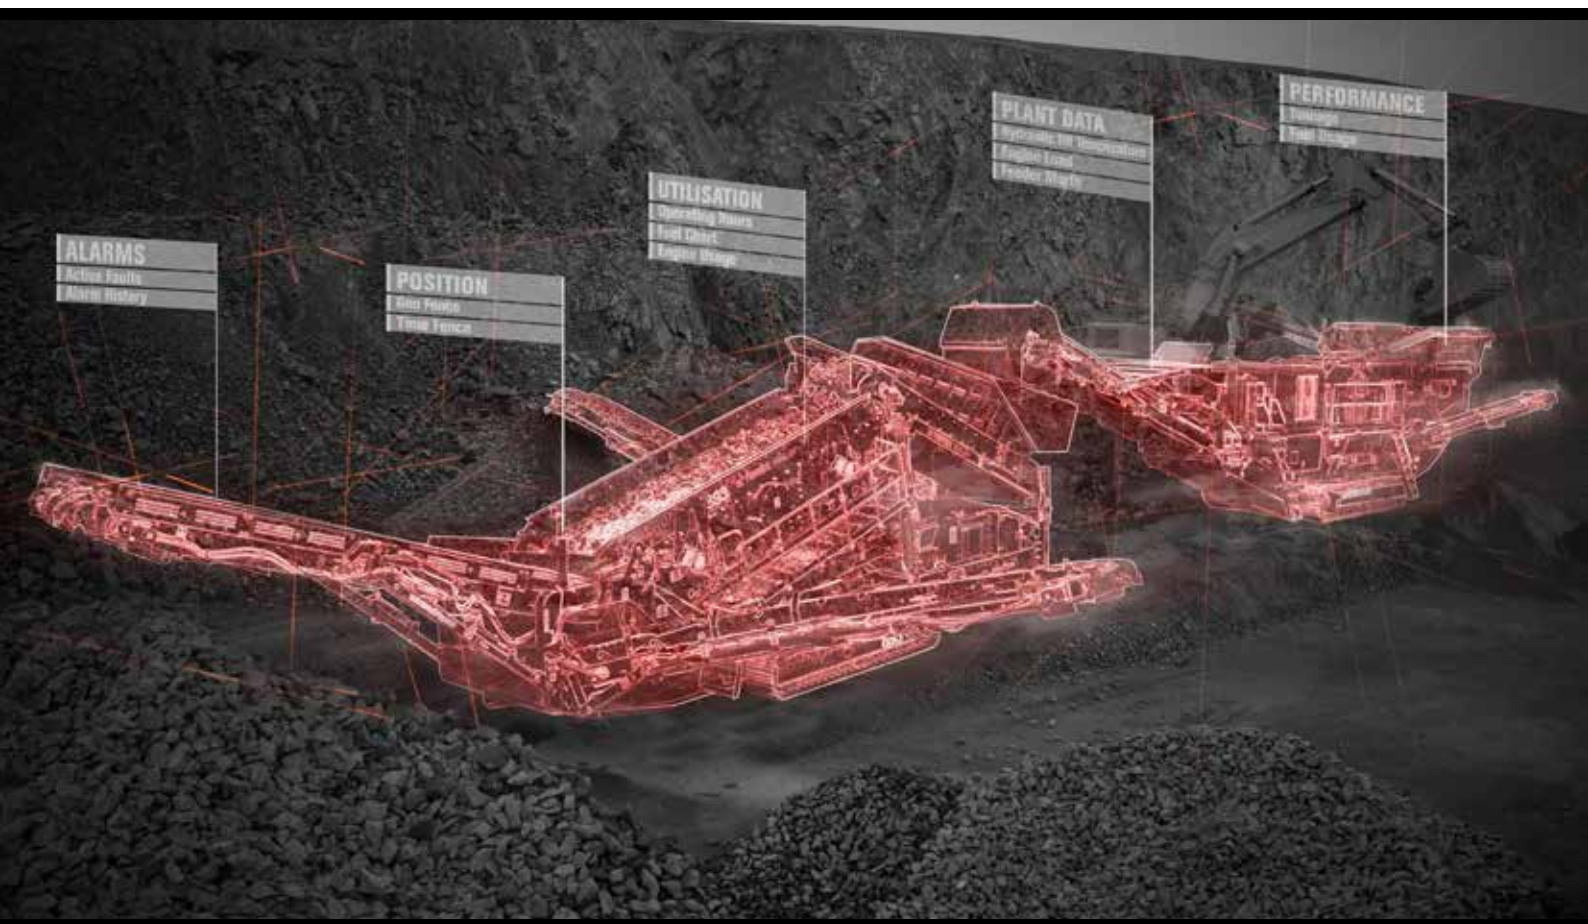

FOR FURTHER INFORMATION CONTACT:

E. finlay.tlink@terex.com

Follow Us:



Effective April 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex USA LTD. makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2010 Terex USA Ltd.



TEREX® | FINLAY

WORKS FOR YOU.™