



TEREX® | FINLAY

INCLINED SCREEN



 **DUALPOWER** 



694+  **DUALPOWER** 

WORKS FOR YOU.™

694+

The dual powered Terex Finlay 694+ inclined screen offers operators the flexibility to power the plant either by an electrical connection or diesel/hydraulic configuration.

The plant features a triple deck screen configuration providing three full sized 6.1m x 1.53m (20' x 5') screens. An innovative hydraulically folded fourth (oversize plus) conveyor allows simple adjustment with variable tilt and slew discharge, between 18 degree and 30 degree, for recirculating in closed circuit with a crusher or stockpiling of finished material.

Features:

- ▶ The plant's electrically driven power system provide significant cost advantages and efficiencies.
- ▶ Superior performance in dusty applications and in high altitude environments.
- ▶ The triple deck 6.1m x 1.53m (20' x 5') screen box with full catwalk access is the largest and most accessible in it's class.
- ▶ Maximum utilisation of three 6.1m x 1.53m (20' x 5') decks provide ultra-efficient screening capacities even at small aggregate sizes.
- ▶ Screen box angle can be hydraulically adjusted to an angle between 18° - 30°.

STANDARD FEATURES

- Tier 3 / Stage IIIA: Caterpillar C4.4 - 4 cylinder diesel engine developing 97kW (130hp) @ 2200 rpm & 2 x 37kW IE2 electric motors
- Tier 4i / Stage IIIB: Caterpillar C4.4 - 4 cylinder diesel engine developing 98kW (131hp) @ 2200 rpm & 2 x 37kW IE2 electric motors (IE3 motors required for the USA)
- Tier 4F / Stage IV: Caterpillar C4.4 - 4 cylinder diesel engine developing 98kW (131hp) @ 2200 rpm & 2 x 37kW IE2 electric motors (IE3 motors required for the USA)
- Hopper Capacity: 8m³ (10.5yd³) - 4.25m (14') variable speed belt feeder
- Belt width: 1.2m (48") wide variable speed belt feeder
- Remote control hydraulic tipping reject grid c/w grouser bars
- 6.1m x 1.53m (20' x 5') All 3 decks
- Quick wedge tensioning - top and middle deck
- Hydraulic tensioning (bottom deck screen mesh)
- Galvanised access catwalks to both sides and around top of screen
- Belt Width: 1.2m (48") plain belt on main conveyor
- Skirting on main conveyor
- Heavy duty undercarriage unit with 500mm wide tracks
- Control operation of tracks via hand-held set with 5m connection lead with heavy duty square connector
- Low level central greasing & emergency stops (4)
- Safety guards in compliance with machinery directive



Oversize Plus Coneyor

- ▶ Drive: Hydraulic variable speed drive via high torque 500cc motor
- ▶ Belt width: 500mm (20")
- ▶ Belt spec: Chevron, EP 315, 3 ply
- ▶ Working Angle: Variable 22° (Max)
- ▶ Speed: variable speed, 120 mpm (400' per min)
- ▶ Discharge Height: Variable 4.8m (Max)
- ▶ Stockpile capacity: 164.5m³ (215.2yd³) @ 40°

Hopper / Feeder

- ▶ Hopper Capacity: 8m³ (10.5yd³)
- ▶ Feed height: 3.67m (12')
- ▶ Feed in width: 4.77m (15' 8") (grid wing plates)
- ▶ Grid aperture: 100mm (4")
- ▶ 10mm replaceable steel hopper liners
- ▶ Drive: Hydraulic variable speed drive via high torque gearbox
- ▶ Beltfeeder belt width: 1.2m (48")
- ▶ Belt Spec: Plain EP 630, 4 ply, 6 + 2mm covers.
- ▶ Speed: variable, 0 - 16 mpm (0 - 53' per min)
- ▶ Wide mouth opening

Undercarriage

- ▶ Shoe Width: 500mm (20")
- ▶ Sprocket Centres: 4.2m (13' 9")
- ▶ Speed: 0.8 km/h
- ▶ Gradeability: 32.6°
- ▶ Raking Angle: 9°

Main conveyor

- ▶ Drive: Hydraulic variable speed drive via high torque 630cc motor
- ▶ Belt width: 1.2m (48")
- ▶ Belt spec: Plain 3 ply belt, EP400
- ▶ Hydraulic adjust
- ▶ Belt Speed: 92 mpm (302' per min)
- ▶ Steel skirted full length of conveyor

Screen box

- ▶ All decks: 6.1m x 1.53m (20' x 5')
- ▶ Wedge side tensioned Top and Middle Deck mesh
- ▶ Hydraulic end tensioned Bottom deck mesh
- ▶ Drive: Hydraulic heavy duty 2-Bearing
- ▶ Screen Angle: 18° - 30°, hydraulic adjust
- ▶ Screen speed: 1000 rpm
- ▶ Screen stroke standard: 7.5mm (5/16")
- ▶ Abrasion resistant material impact plate
- ▶ Spreader plate
- ▶ Galvanised access catwalks on both sides and top end of screen
- ▶ Total screening area: 27.8m² (300ft²)

Fines conveyor

- ▶ Drive: Hydraulic variable speed drive via high torque 800cc motor
- ▶ Belt width: 1.2m (48")
- ▶ Belt spec: Plain, 3 ply, EP400
- ▶ Working Angle: Variable 25° (Max)
- ▶ Rosta scraper on head drum
- ▶ Speed: Not variable speed, 92 mpm (302' per min)
- ▶ Standard Discharge Height: 5.2m (17' 1")
- ▶ Stockpile capacity: 260m³ (340yd³)

Oversize / Middle grade conveyors

- ▶ Drive: Hydraulic variable speed drive via high torque 500cc motor
- ▶ Belt width: 800mm (32")
- ▶ Belt spec: Chevron EP400, 3 ply
- ▶ Working Angle: 24°
- ▶ Speed: variable speed, 0 - 125 mpm (410' per min)
- ▶ Hydraulic Folding
- ▶ Discharge Height: 4.71m (15' 5")
- ▶ Stockpile capacity: 193m³ (252yd³)


Power unit

- ▶ Tier 3 / Stage IIIA: Caterpillar C4.4 Engine Power: 97kW (130hp) Engine Speed: 2200 rpm
- ▶ Tier 4i / Stage IIIB: Caterpillar C4.4 Engine Power: 98kW (131hp) Engine Speed: 2200 rpm
- ▶ Tier 4F / Stage IV: Caterpillar C4.4 Engine Power: 98kW (131hp) Engine Speed: 2200 rpm

Transport Dimensions



Working Dimensions

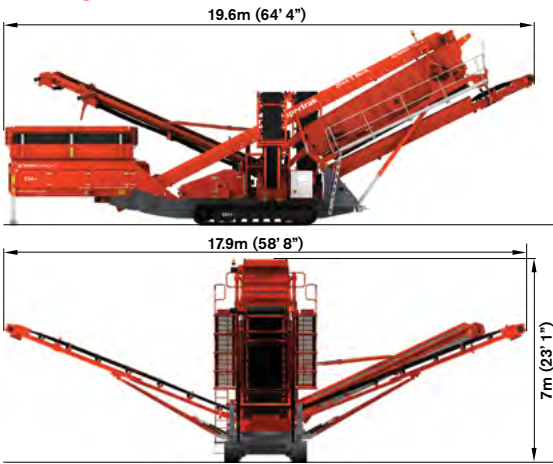

Machine Weight: * 40,000kg (88,184lbs)
* with tipping grid

WORKS FOR YOU.™

Follow us on:



www.terexfinlay.com

Effective January 2015. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex GB Ltd. makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2010 Terex GB Ltd.



TEREX® | FINLAY

WORKS FOR YOU.™